


BRAVO series

RECESSED FIXED DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	15°	DL-1200-12-3015-P-C
				25°	DL-1200-12-3025-P-C
				38°	DL-1200-12-3038-P-C
				60°	DL-1200-12-3060-P-C
COB LED	12W	AC220-240V	4000K	15°	DL-1200-12-4015-P-C
				25°	DL-1200-12-4025-P-C
				38°	DL-1200-12-4038-P-C
				60°	DL-1200-12-4060-P-C
COB LED	12W	AC220-240V	5000K	15°	DL-1200-12-5015-P-C
				25°	DL-1200-12-5025-P-C
				38°	DL-1200-12-5038-P-C
				60°	DL-1200-12-5060-P-C



Power Supply: **P** (1-On / Off) **2**-Phase Dim **3**-DALI Dim **4**-1-10V Dim

Colour Finish: **C** (WW-White / White) **BB**-Black / Black



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm



BRAVO series




PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design: are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.

BRAVO series

RECESSED FIXED DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	15W	AC220-240V	3000K	15°	DL-1025-15-3015-P-C
				25°	DL-1025-15-3025-P-C
				38°	DL-1025-15-3038-P-C
				60°	DL-1025-15-3038-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1025-15-4015-P-C
				25°	DL-1025-15-4025-P-C
				38°	DL-1025-15-4038-P-C
				60°	DL-1025-15-4038-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1025-15-5015-P-C
				25°	DL-1025-15-5025-P-C
				38°	DL-1025-15-5038-P-C
				60°	DL-1025-15-5038-P-C





Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

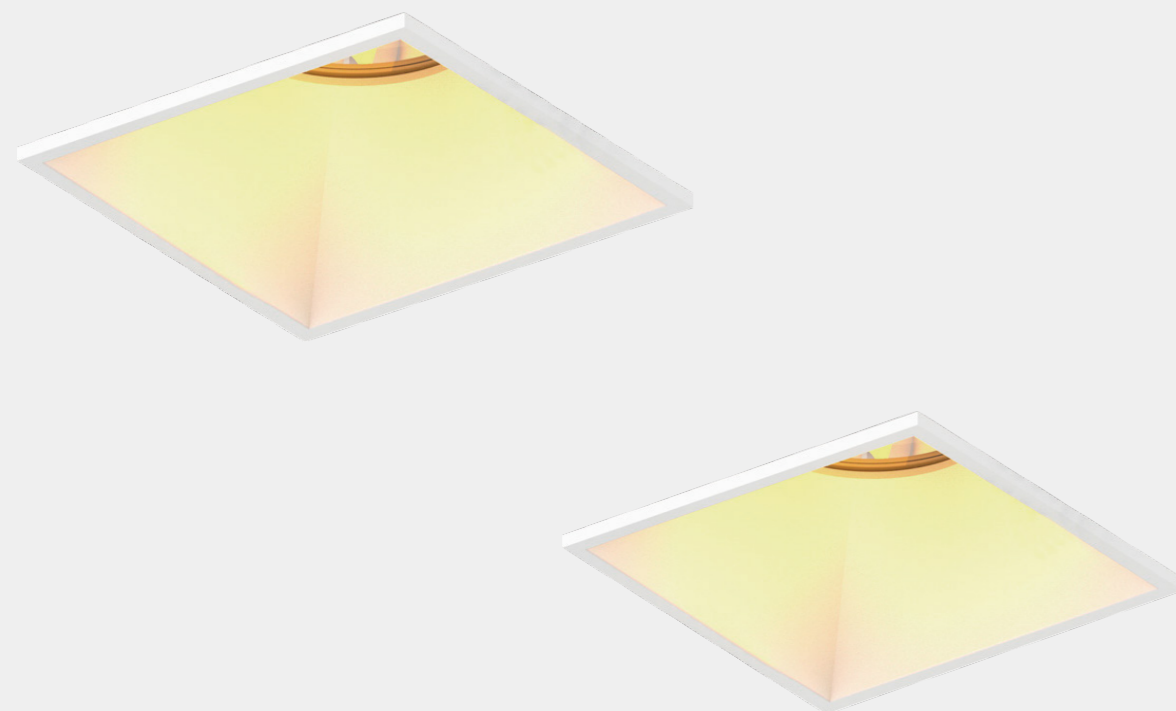


BRAVO series

PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design; are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.

NICO series

RECESSED FIXED DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6.5W	AC220-240V	3000K	15°	DL-10010-06-3015-P-C
				24°	DL-10010-06-3024-P-C
				36°	DL-10010-06-3036-P-C
COB LED	6.5W	AC220-240V	4000K	15°	DL-10010-06-4015-P-C
				24°	DL-10010-06-4024-P-C
				36°	DL-10010-06-4036-P-C
COB LED	6.5W	AC220-240V	5000K	15°	DL-10010-06-5015-P-C
				24°	DL-10010-06-5024-P-C
				36°	DL-10010-06-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-10023-15-3015-P-C
				24°	DL-10023-15-3024-P-C
				36°	DL-10023-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-10023-15-4015-P-C
				24°	DL-10023-15-4024-P-C
				36°	DL-10023-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-10023-15-5015-P-C
				24°	DL-10023-15-5024-P-C
				36°	DL-10023-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White BB-Black / Black)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-10010-06

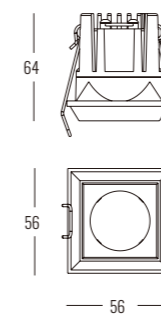

DL-10023-15

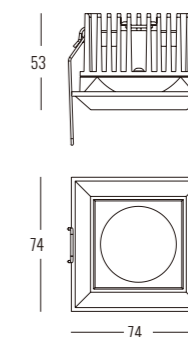

BRAVO series

PRODUCT INTRODUCTION

The spirit of minimalist modern-architecture and the will of the finest integration of light in interior design; are faithfully represented. It's reduced dimensions and its tactful presence conform the essence of this piece, enshrining in its small size, a technical vanguard of the latest generation.