


PICCO series

RECESSED FIXED DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	15°	DL-1012-05-3015-P-C
				24°	DL-1012-05-3024-P-C
				36°	DL-1012-05-3036-P-C
COB LED	5W	AC220-240V	4000K	15°	DL-1012-05-4015-P-C
				24°	DL-1012-05-4024-P-C
				36°	DL-1012-05-4036-P-C
COB LED	5W	AC220-240V	5000K	15°	DL-1012-05-5015-P-C
				24°	DL-1012-05-5024-P-C
				36°	DL-1012-05-5036-P-C
COB LED	9W	AC220-240V	3000K	15°	DL-1013-09-3015-P-C
				24°	DL-1013-09-3024-P-C
				36°	DL-1013-09-3036-P-C
COB LED	9W	AC220-240V	4000K	15°	DL-1013-09-4015-P-C
				24°	DL-1013-09-4024-P-C
				36°	DL-1013-09-4036-P-C
COB LED	9W	AC220-240V	5000K	15°	DL-1013-09-5015-P-C
				24°	DL-1013-09-5024-P-C
				36°	DL-1013-09-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-1014-15-3015-P-C
				24°	DL-1014-15-3024-P-C
				36°	DL-1014-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-1014-15-4015-P-C
				24°	DL-1014-15-4024-P-C
				36°	DL-1014-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-1014-15-5015-P-C
				24°	DL-1014-15-5024-P-C
				36°	DL-1014-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: C (WW-White / White BB-Black / Black)




White Reflector Black Reflector


Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm






DL-1012-05



DL-1013-09



DL-1014-15

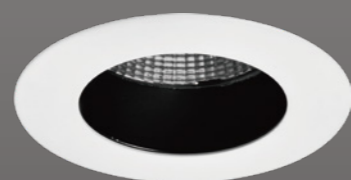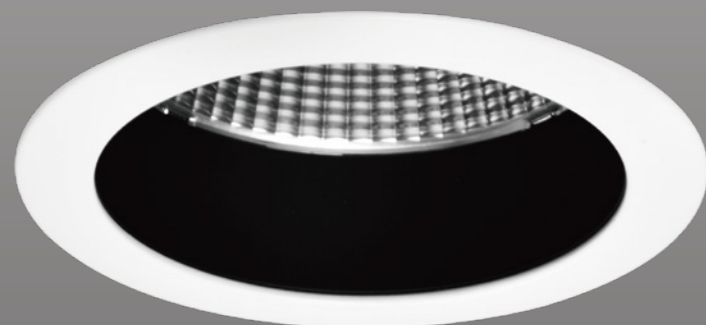

PICCO series

PRODUCT INTRODUCTION

COB lighting source + high-quality optical lens, softens light ; aluminum radiator, extend life.
Lamps trimless installation, better integration of the structure of the room, to retain the original decoration style