


DIX series

RECESSED ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	8W	AC220-240V	3000K	20°	DL-5208-08-3015-P-C
				40°	DL-5208-08-3024-P-C
				60°	DL-5208-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-5208-08-4015-P-C
				24°	DL-5208-08-4024-P-C
				36°	DL-5208-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-5208-08-5015-P-C
				24°	DL-5208-08-5024-P-C
				36°	DL-5208-08-5036-P-C
COB LED	8W	AC220-240V	3000K	20°	DL-5208A-08-3015-P-C
				40°	DL-5208A-08-3024-P-C
				60°	DL-5208A-08-3036-P-C
COB LED	8W	AC220-240V	4000K	15°	DL-5208A-08-4015-P-C
				24°	DL-5208A-08-4024-P-C
				36°	DL-5208A-08-4036-P-C
COB LED	8W	AC220-240V	5000K	15°	DL-5208A-08-5015-P-C
				24°	DL-5208A-08-5024-P-C
				36°	DL-5208A-08-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)



Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm



DL-5208-08




— 82 —



DL-5208A-08




— 82 —



DIX series

TRIMLESS ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13°	DL-5202-06-3013-P-C
				24°	DL-5202-06-3024-P-C
				36°	DL-5202-06-3036-P-C
				60°	DL-5202-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-5202-06-4013-P-C
				24°	DL-5202-06-4024-P-C
				36°	DL-5202-06-4036-P-C
				60°	DL-5202-06-4060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-5202-06-5013-P-C
				24°	DL-5202-06-5024-P-C
				36°	DL-5202-06-5036-P-C
				60°	DL-5202-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13°	DL-5202-13-3013-P-C
				24°	DL-5202-13-3024-P-C
				36°	DL-5202-13-3036-P-C
				60°	DL-5202-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-5202-13-4013-P-C
				24°	DL-5202-13-4024-P-C
				36°	DL-5202-13-4036-P-C
				60°	DL-5202-13-4060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-5202-13-5013-P-C
				24°	DL-5202-13-5024-P-C
				36°	DL-5202-13-5036-P-C
				60°	DL-5202-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-5202-06

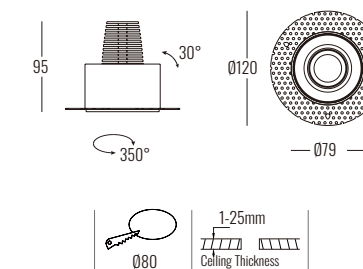

DL-5202-13

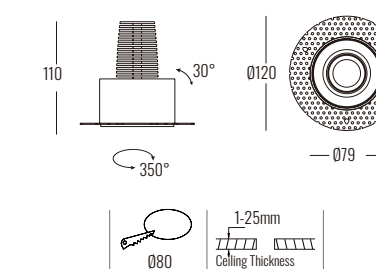

MULTIPLE COLOR COMBINATIONS, SUITABLE FOR DIFFERENT STYLES

MODULE STRUCTURE, EASY TO REPLACE

SURROUND VENT FOR FAST HEAT DISSIPATION



DIX series




PRODUCT INTRODUCTION

Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle reflector for selection, excellent heat sink capability, remote LED driver.

APPLICATION


Supermarkets, chain stores, shopping mall, villas, hotels, halls.

MULTIPLE COLOR COMBINATIONS, SUITABLE FOR DIFFERENT STYLES

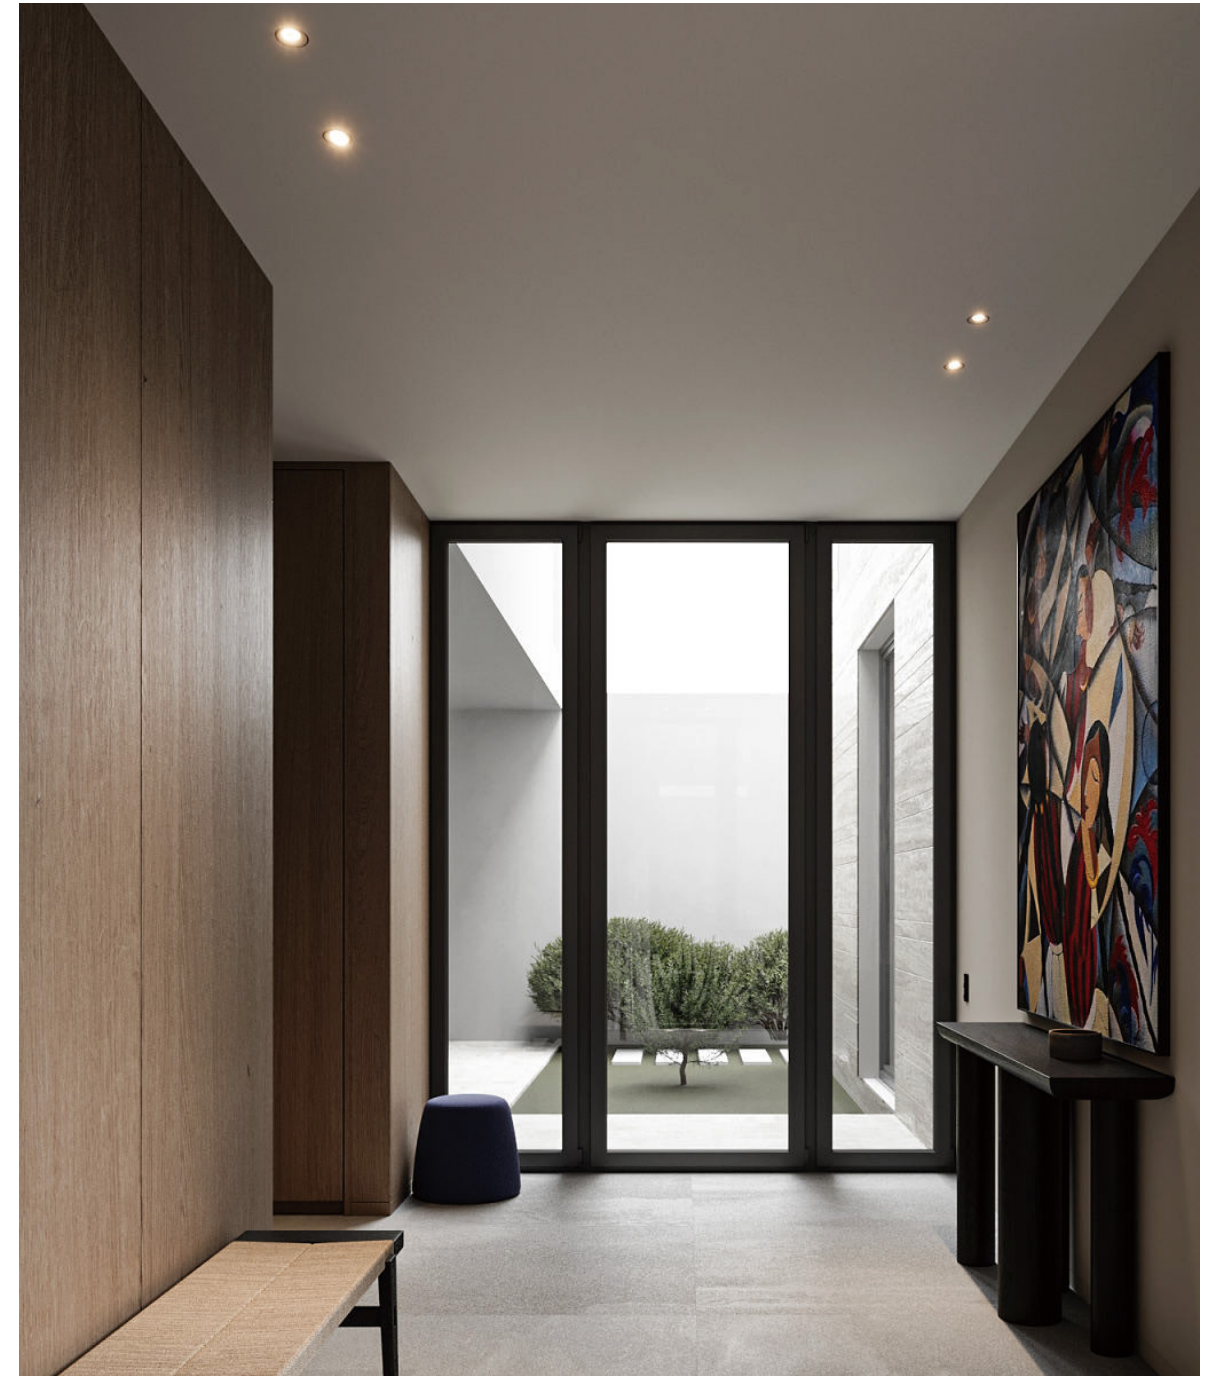

DIX series

RECESSED ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13°	DL-1083A-06-3013-P-C
				24°	DL-1083A-06-3024-P-C
				36°	DL-1083A-06-3036-P-C
				60°	DL-1083A-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-1083A-06-4013-P-C
				24°	DL-1083A-06-4024-P-C
				36°	DL-1083A-06-4036-P-C
				60°	DL-1083A-06-4060-P-C
COB LED	6W	AC220-240V	5000K	13°	DL-1083A-06-5013-P-C
				24°	DL-1083A-06-5024-P-C
				36°	DL-1083A-06-5036-P-C
				60°	DL-1083A-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13°	DL-1083A-13-3013-P-C
				24°	DL-1083A-13-3024-P-C
				36°	DL-1083A-13-3036-P-C
				60°	DL-1083A-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-1083A-13-4013-P-C
				24°	DL-1083A-13-4024-P-C
				36°	DL-1083A-13-4036-P-C
				60°	DL-1083A-13-4060-P-C
COB LED	13W	AC220-240V	5000K	13°	DL-1083A-13-5013-P-C
				24°	DL-1083A-13-5024-P-C
				36°	DL-1083A-13-5036-P-C
				60°	DL-1083A-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)




Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1083A-06




DL-1083A-13



DIX series

RECESSED ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	6W	AC220-240V	3000K	13°	DL-1083-06-3013-P-C
				24°	DL-1083-06-3024-P-C
				36°	DL-1083-06-3036-P-C
				60°	DL-1083-06-3060-P-C
COB LED	6W	AC220-240V	4000K	13°	DL-1083-06-4013-P-C
				24°	DL-1083-06-4024-P-C
				36°	DL-1083-06-4036-P-C
				60°	DL-1083-06-4060-P-C
COB LED	6W	AC220-240V	5000K	13°	DL-1083-06-5013-P-C
				24°	DL-1083-06-5024-P-C
				36°	DL-1083-06-5036-P-C
				60°	DL-1083-06-5060-P-C
COB LED	13W	AC220-240V	3000K	13°	DL-1083-13-3013-P-C
				24°	DL-1083-13-3024-P-C
				36°	DL-1083-13-3036-P-C
				60°	DL-1083-13-3060-P-C
COB LED	13W	AC220-240V	4000K	13°	DL-1083-13-4013-P-C
				24°	DL-1083-13-4024-P-C
				36°	DL-1083-13-4036-P-C
				60°	DL-1083-13-4060-P-C
COB LED	13W	AC220-240V	5000K	13°	DL-1083-13-5013-P-C
				24°	DL-1083-13-5024-P-C
				36°	DL-1083-13-5036-P-C
				60°	DL-1083-13-5060-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White WB-White / Black WS-White / Silver WO-White / Orange BG-Black / Gold)



Controller: On / Off, Dimmable, Dali

DIMENSION
unit:mm

DL-1083-06



DL-1083-13

