




FENDI series

9W / 15W / 30W



FENDI series

RECESSED ADJUSTABLE DOWNLIGHT



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	5W	AC220-240V	3000K	15°	DL-9812-05-3015-P-C
				24°	DL-9812-05-3024-P-C
				36°	DL-9812-05-3036-P-C
COB LED	5W	AC220-240V	4000K	15°	DL-9812-05-4015-P-C
				24°	DL-9812-05-4024-P-C
				36°	DL-9812-05-4036-P-C
COB LED	5W	AC220-240V	5000K	15°	DL-9812-05-5015-P-C
				24°	DL-9812-05-5024-P-C
				36°	DL-9812-05-5036-P-C
COB LED	15W	AC220-240V	3000K	15°	DL-9789-15-3015-P-C
				24°	DL-9789-15-3024-P-C
				36°	DL-9789-15-3036-P-C
COB LED	15W	AC220-240V	4000K	15°	DL-9789-15-4015-P-C
				24°	DL-9789-15-4024-P-C
				36°	DL-9789-15-4036-P-C
COB LED	15W	AC220-240V	5000K	15°	DL-9789-15-5015-P-C
				24°	DL-9789-15-5024-P-C
				36°	DL-9789-15-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)





Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-9812-05

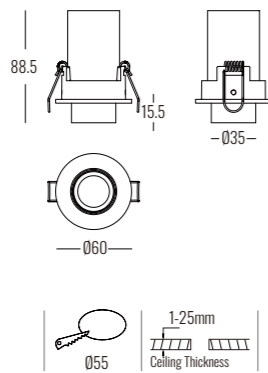

DL-9789-15

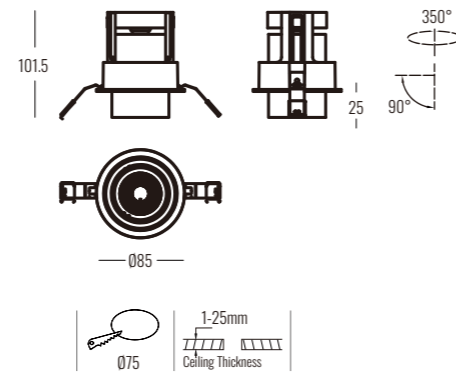

Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	24W	AC220-240V	3000K	15°	DL-9790-24-3015-P-C
				24°	DL-9790-24-3024-P-C
				36°	DL-9790-24-3036-P-C
COB LED	24W	AC220-240V	4000K	15°	DL-9790-24-4015-P-C
				24°	DL-9790-24-4024-P-C
				36°	DL-9790-24-4036-P-C
COB LED	24W	AC220-240V	5000K	15°	DL-9790-24-5015-P-C
				24°	DL-9790-24-5024-P-C
				36°	DL-9790-24-5036-P-C
COB LED	35W	AC220-240V	3000K	15°	DL-9791-35-3015-P-C
				24°	DL-9791-35-3024-P-C
				36°	DL-9791-35-3036-P-C
COB LED	35W	AC220-240V	4000K	15°	DL-9791-35-4015-P-C
				24°	DL-9791-35-4024-P-C
				36°	DL-9791-35-4036-P-C
COB LED	35W	AC220-240V	5000K	15°	DL-9791-35-5015-P-C
				24°	DL-9791-35-5024-P-C
				36°	DL-9791-35-5036-P-C

Power Supply: P (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)


Colour Finish: C (WW-White / White BB-Black / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

DL-9790-24

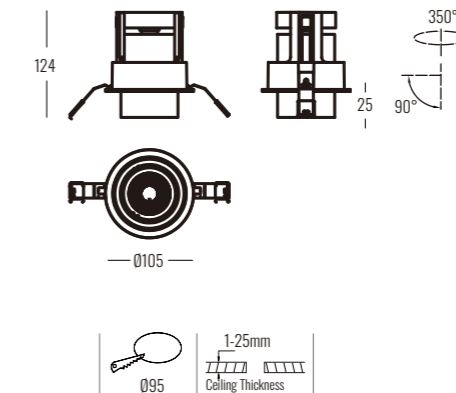

DL-9791-35

