



TINO series

FIXED SURFACE DOWN LAMP WITH LEDIL LENS



Light Source	Power	Voltage	CCT	Beam Angle	Code
COB LED	12W	AC220-240V	3000K	13°	DL-1078A-12-3013-P-C
				30°	DL-1078A-12-3030-P-C
				46°	DL-1078A-12-3046-P-C
COB LED	12W	AC220-240V	4000K	13°	DL-1078A-12-3010-P-C
				30°	DL-1078A-12-3023-P-C
				46°	DL-1078A-12-3038-P-C
COB LED	12W	AC220-240V	5000K	13°	DL-1078A-12-3010-P-C
				30°	DL-1078A-12-3023-P-C
				46°	DL-1078A-12-3038-P-C



Power Supply: **P** (1-On / Off 2-Phase Dim 3-DALI Dim 4-1-10V Dim)

Colour Finish: **C** (WW-White / White BB-Black / Black WB-White / Black)



Controller: On / Off, Dimmable, Dali

DIMENSION unit:mm

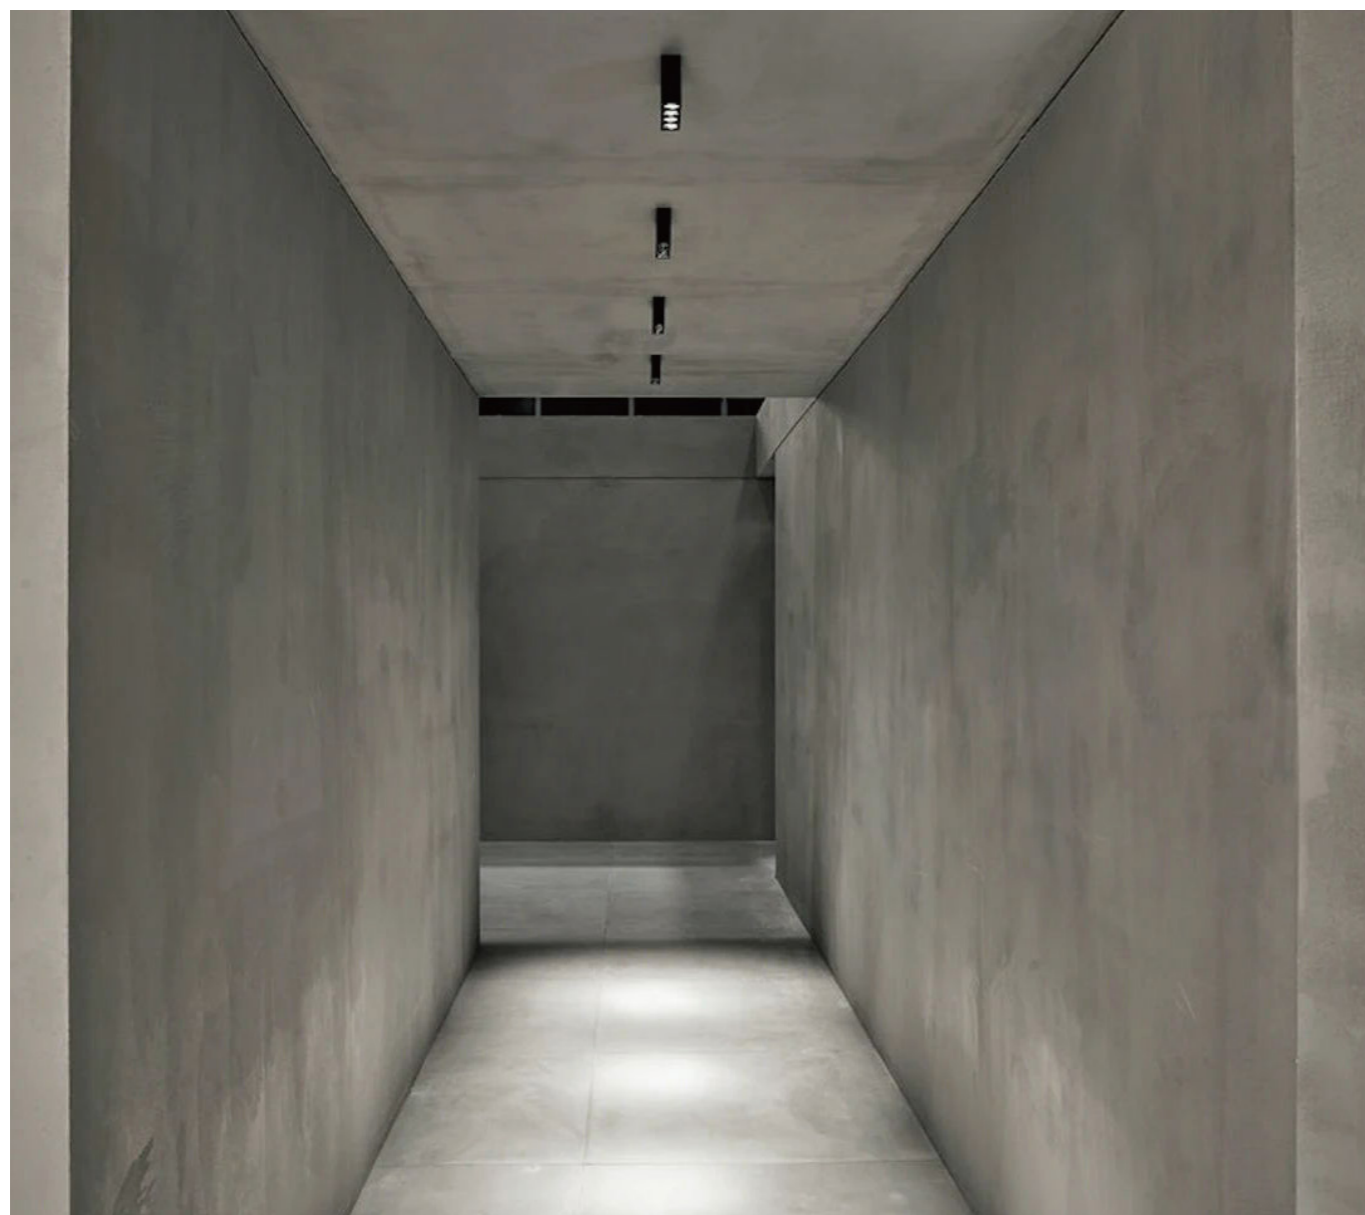

TINO series

PRODUCT INTRODUCTION

The excellence of comfort: UGR 16 for outstanding glare protection, homogeneity in light distribution and delivered lux compliant to the most strict standards of the industry. Light Shadow reaches extreme cut-off angles without sacrificing high efficiency and very small dimensions.